

Veneer Surface | Particleboard Core Doors | 20-min & Non-Rated

Neutral Pressure, Positive Pressure, Environmental

Standard Models: APC

Environmental Models: APC-NAUF, APC-FSC, APC-NAUF FSC

Product Features and Specifications Interior use only

Thickness 1-3/4", 1-3/8"

Maximum Size 4/0 x 9/6 (1-3/4")
3 x 7 (1-3/8")

Minimum Size 1-5 1/2" x 5-11"

Surface Material Wood Veneers

Fire-Rating

	ITS-WH and UL- Max 20 minute			
	Non Rated	NP	Cat. A (PP)	Cat. B (PPFM)
Single	4/0x9/6	4/0x9/6	4/0x9/6	4/0x9/6
Pair	8/0x9/6	8/0x9/6	8/0x9/0	8/0x9/0
DE Pair	8/0x9/6	8/0x8/0	8/0x9/0	8/0x9/0
1-3/8" Single	3/0x7/0	3/0x7/0	NA	3/0x7/0

Doors will have No fire rating.

Construction Bonded

Crossbands One Piece High Density Fiberboard (HDF)

Vertical Edges* SCL with Veneer edge band
Additional stile options available upon request

Horizontal Edges* Wood

Face & Core Assembly Adhesive Type 1

Core Wood based Particleboard core (complies with ANSI A208.1). See WDMA Performance Level below.

Lite Openings Wood or metal lite kits available

Louvers •Wood
•Metal

Warranty Lifetime. No exterior warranty

Factory Finish •Clear, Standard Stain, Custom Color. Meets WDMA TR-8 and AWS System 9.

Stain TBS By VA

Security Ratings Class 40, highest security rating possible per UBC standard 41-1 & ASTM F-476 section 18

Acoustic Ratings See Appendix M

Environmental Options & LEED Credit Contribution
(Not all credits may be available with some constructions)

- MR 4-Recycled Content- all models
- MR 6-Renewable Materials - all models with Bamboo veneer
- MR 7-Certified Wood-upon request
- IEQ 4.4-Low-Emitting Materials- all NAUF models
No Added Urea Formaldehyde Resins
- CARB Phase II Compliant

Quality Standards
(Quality Assurance/
Industry Standards)

- Aesthetic: WDMA I.S.1A Architectural Wood Flush Doors (Standard construction)
- *Other association aesthetic standards upon request
- WDMA Performance Duty Level: Heavy Duty
- *Product does not require blocking for surface hardware

Note: Mohawk Flush Doors® are manufactured per the standards listed on this page.

Specifications are subject to change without notice.


*Note: Fire-Rated doors will be constructed per label service listing and may deviate from above.



ITEM 2



White Birch | Mahogany Stain | Office Segment

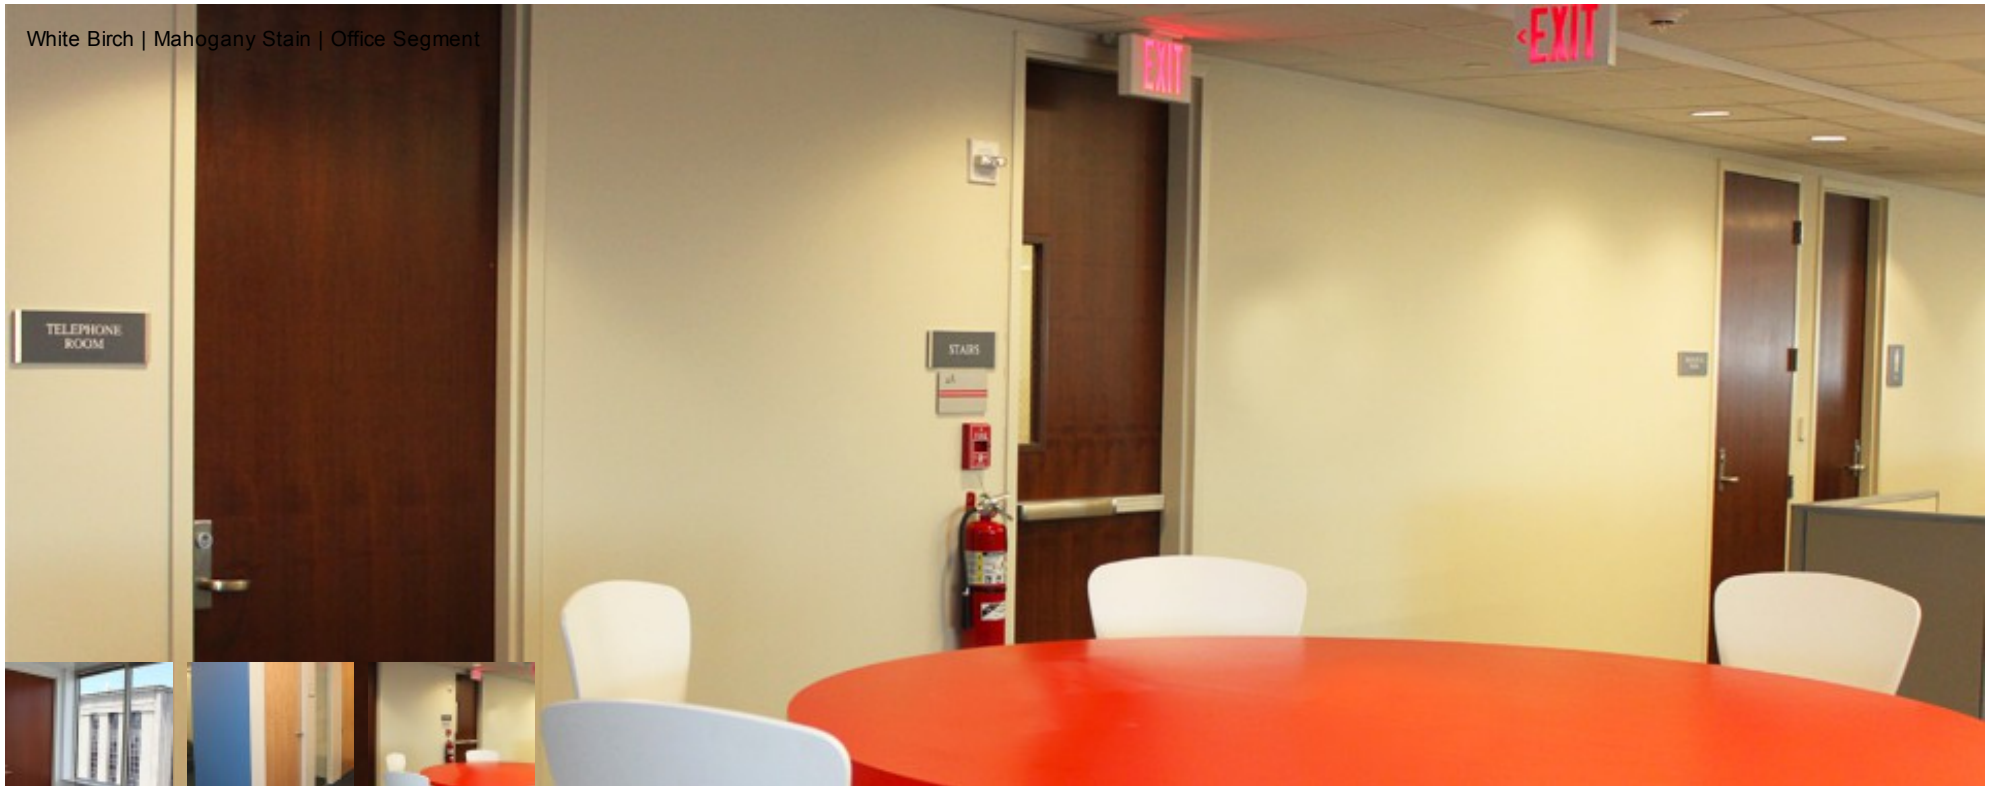

Wood Veneer

[Overview](#)

[Surface Materials](#)

[Construction](#)

[Home](#) [Design Options](#) [Louvers](#)

Wood Veneer - Louvers

Mohawk offers louvers in both wood and metal.
Fusible link metal louvers are available for fire-rated doors.

Design Options

- Bi-Fold Doors
- Recessed Mouldings
- Applied Mouldings
- Lites
- Louvers**
- Mirrored Doors

Specialty Applications

Environmental Details

Specifications

Testing


Logistics

Flush louvers are available on all flush veneer, hardboard, and MDO products. Note that on Bi-Pass and Bifold Doors louvers are available in flush profiles only to ensure proper operation.



Wood Louver Chevron Design

LV-1 1-1/64" x 1-1/16" Louver Moulding

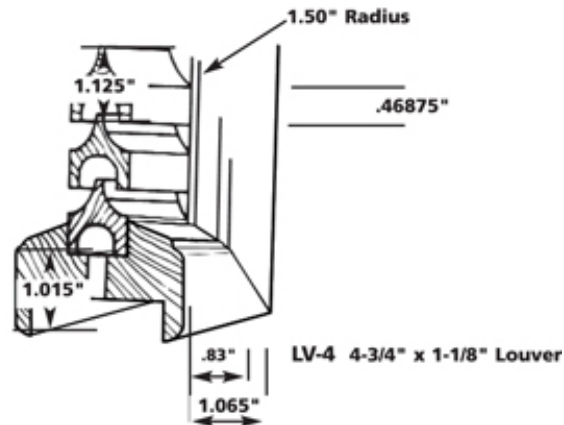

NEED TO KNOW SIZE OF LOUVERS DESIRED***

For Distributors Sales Team Contact Us

Copyright © 2014 Mohawk Doors

